


CEI-4x10GBASE-T User's Guide

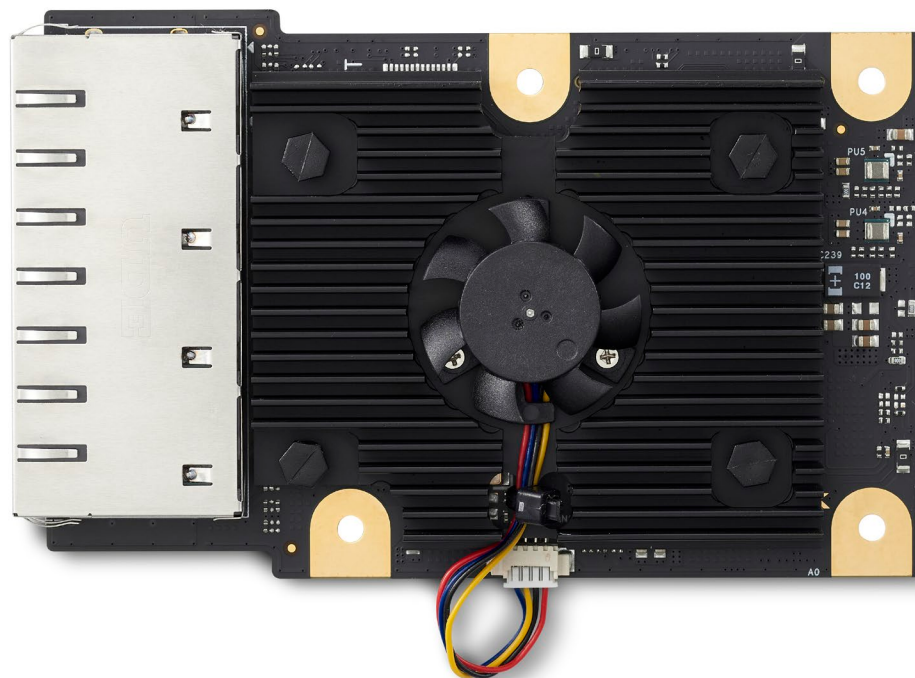

Revision History

Revision	Description	Date	Author
1.0	CEI-4x10GBASE-T Card	2023/6/29	Lauryn Hsu

Preface

Disclaimer

Information in this document is provided in connection with ADLINK products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in ADLINK's Terms and Conditions of Sale for such products, ADLINK assumes no liability whatsoever, and ADLINK disclaims any express or implied warranty, relating to sale and/or use of ADLINK products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right. If you intend to use ADLINK products in or as medical devices, you are solely responsible for all required regulatory compliance, including, without limitation, Title 21 of the CFR (US), Directive 2007/47/EC (EU), and ISO 13485 & 14971, if any. ADLINK may make changes to specifications and product descriptions at any time, without notice.

Environmental Responsibility

ADLINK is committed to fulfil its social responsibility to global environmental preservation through compliance with the European Union's Restriction of Hazardous Substances (RoHS) directive and Waste Electrical and Electronic Equipment (WEEE) directive. Environmental protection is a top priority for ADLINK. We have enforced measures to ensure that our products, manufacturing processes, components, and raw materials have as little impact on the environment as possible. When products are at their end of life, our customers are encouraged to dispose of them in accordance with the product disposal and/or recovery programs prescribed by their nation or company. 



California Proposition 65 Warning: This product can expose you to chemicals including acrylamide, arsenic, benzene, cadmium, Tris(1,3-dichloro-2-propyl)phosphate (TDCPP), 1,4-Dioxane, formaldehyde, lead, DEHP, styrene, DINP, BBP, PVC, and vinyl materials, which are known to the State of California to cause cancer, and acrylamide, benzene, cadmium, lead, mercury, phthalates, toluene, DEHP, DIDP, DnHP, DBP, BBP, PVC, and vinyl materials, which are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Trademarks

Product names mentioned herein are used for identification purposes only and may be trademarks / registered trademarks of respective companies.

Copyright © 2021 ADLINK Technology Incorporated

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

Safety Instructions

For user safety, please read and follow all Instructions, **WARNINGS**, **CAUTIONS**, and **NOTES** marked in this manual and on the associated equipment before handling/operating the equipment.

Read these safety instructions carefully.

- Keep this manual for future reference.
- Read the specifications section of this manual for detailed information on the operating environment of this equipment.
- Turn off power and unplug any power cords/cables when installing/mounting or un-installing/removing equipment.
- To avoid electrical shock and/or damage to equipment:
- Keep equipment away from water or liquid sources;
- Keep equipment away from high heat or high humidity;
- Keep equipment properly ventilated (do not block or cover ventilation openings);
- Make sure to use recommended voltage and power source settings;
- Always install and operate equipment near an easily accessible electrical socket outlet;
- Secure the power cord (do not place any object on/over the power cord);
- Only install/attach and operate equipment on stable surfaces and/or recommended mountings;
- If the equipment will not be used for long periods of time, turn off the power source and unplug the equipment.

Conventions

The following conventions may be used throughout this manual, denoting special levels of information



Note: This information adds clarity or specifics to text and illustrations.



Caution: This information indicates the possibility of minor physical injury, component damage, data loss, and/or program corruption.



Warning: This information warns of possible serious physical injury, component damage, data loss, and/or program corruption.

Getting Service

Ask an Expert: <http://askanexpert.adlinktech.com>

ADLINK Technology, Inc.

No. 66, Huaya 1st Rd., Guishan District, Taoyuan City 333411, Taiwan

Tel: +886-3-216-5088

Fax: +886-3-328-5706

Email: service@adlinktech.com

Ampro ADLINK Technology, Inc.

6450 Via Del Oro, San Jose, CA 95119-1208, USA

Tel: +1-408-360-0200

Toll Free: +1-800-966-5200 (USA only)

Fax: +1-408-600-1189

Email: info@adlinktech.com

ADLINK Technology (China) Co., Ltd.

300 Fang Chun Rd., Zhangjiang Hi-Tech Park, Pudong New Area, Shanghai, 201203, China

Tel: +86-21-5132-8988

Fax: +86-21-5132-3588

Email: market@adlinktech.com

ADLINK Technology GmbH

Hans-Thoma-Strasse 11, D-68163 Mannheim, Germany

Tel: +49-621-43214-0

Fax: +49-621 43214-30

Email: emea@adlinktech.com

Please visit the Contact page at www.adlinktech.com for information on how to contact the ADLINK regional office nearest you.

Table of Contents

2.1. Interface..... 10

2.2. 10GbE PHY 10

2.3. Dimensions..... 11

2.4. Operating Temperature..... 11

2.5. Specification Compliance..... 11

2.6. IO Expander & EEPROM 12

4.1. Input Interface Definitions..... 14

5.1. Connector and LED Locations 16

5.2. LED Indicators 17

5.3. 10GbE Adaptor Card Installation 18

List of Figures

Figure 1 – CEI-4x10GBASE-T function diagram..... 13

Figure 3 – Module feature locations.....16

Figure 5 – CEI-4x10GBASE-T mechanical dimensions 19

1. Introduction

The ADLINK CEI-4x10GBASE-T Card is a 10GbE copper network adapter card that delivers fast 10Gbps network access. It converts up to four 10GBASE-KR interfaces & related CEI style sideband signals to four 10GBASE-T interfaces at RJ45 connectors, through Intel X557-AT4 PHY and multiple IO expanders.

The CEI-4x10GBASE-T Card can only be used with ADLINK's COM-HPC-sIDH module (PICMG COM-HPC Rev 1.0 Server Type compliant)

By using the CEI-4x10GBASE-T Card with an COM-HPC Server reference carrier board and COM-HPC-sIDH module, customers can quickly emulate the functionality of their end product for software development and hardware verification. Applications include entry level switch, cloud storage platforms and communications servers.

2. Specifications

2.1. Interface

Input

Up to four 10GBASE-KR & related CEI style sideband signals from a dedicated COM-HPC Server Type through 64-pin OCP Mezzanine card connector

Output

Up to four 10GBASE-T at four RJ45 connectors

2.2. 10GbE PHY

PHY

Intel X557-AT4 Copper


Converts 10GBASE-KR and sidebands to 10GBASE-T

PHY FW on SPI ROM

Dedicated ROM for PHY firmware store

ID EEPROM (AT24C32E EEPROM)

I2C based device, identify the capabilities of the attached site. This allows the firmware to configure the attached PHY(s) and necessary I/O modes.

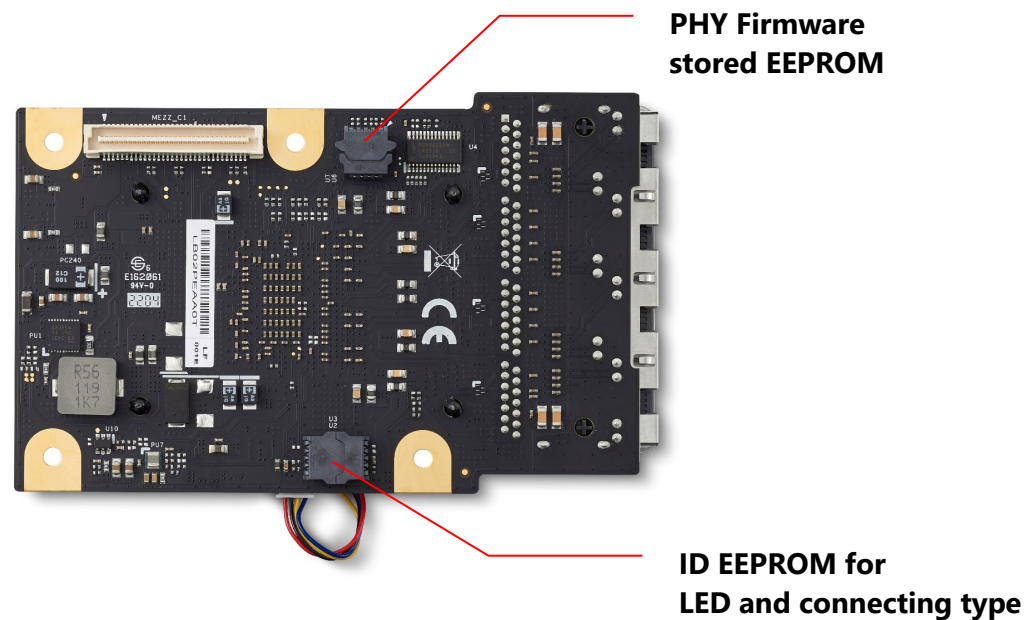

2.3. Dimensions

110 mm x 68 mm (PCB only, including edge connector)

2.4. Operating Temperature

0°C to +55°C

2.5. Specification Compliance

PICMG COM-HPC: Rev 1.0 Server Type

2.6. IO Expander & EEPROM

Additional expander and EEPROM not mention above are described as below:

PCA9575 IO Expander

I2C based device, deserialize for low speed sideband IO, including interrupt, reset and so on

PCA9685 LED Ctrl

I2C based device, handle the LED indication

3. Block Diagram

OCP-X557-AT4-4x10GBASE-T

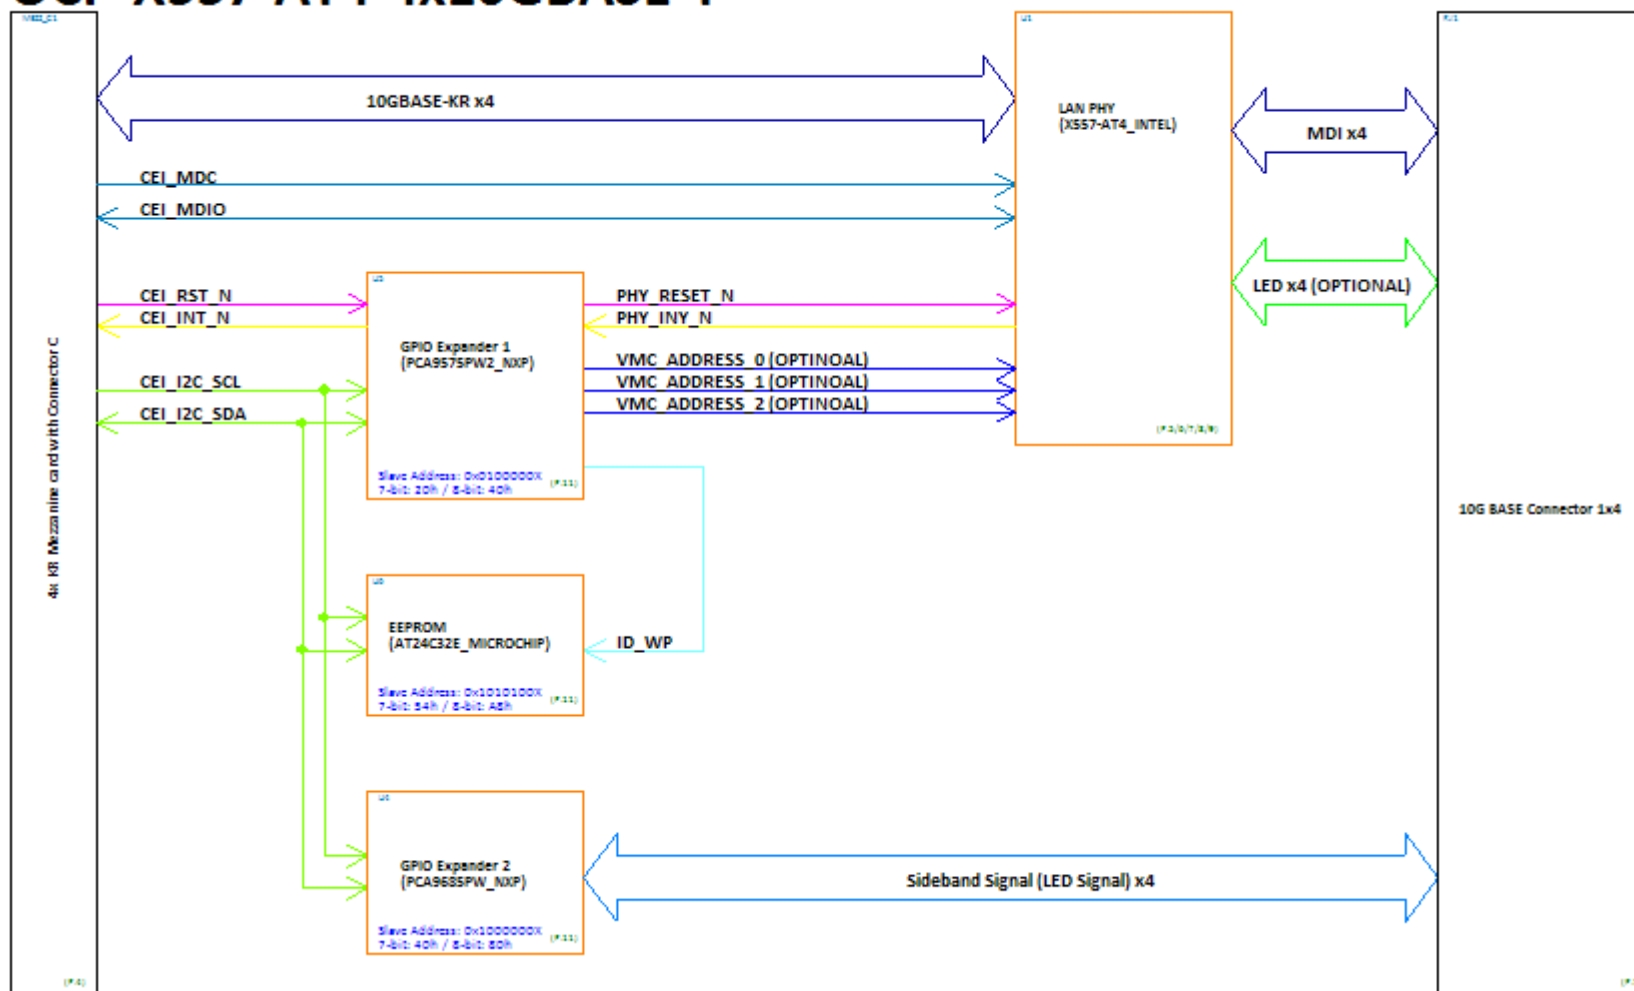


Figure 1 – CEI-4x10GBASE-T function diagram

4. Pinout and Signal Descriptions

4.1. Input Interface Definitions

The table below is a comprehensible list of all signal pins supported on the 64-pin OCP connector of CEI-4x10GBASE-T Card. The signal naming follow the PICMG COM-HPC Rev 1.0 Server Type specification. Signals described in the specification but not supported on the CEI-4x10GBASE-T Card are strikethrough ~~STRIKETHROUGH~~.



Table 1: CEI-4x10GBASE-T Card Pin Definitions

Pin	Name	Pin	Name
33	+12V	1	MEZZC_SMCLK
34	+12V	2	MEZZC_SMDATA
35	+12V	3	MEZZC_EXT_MDIO_I2C_SEL_OU
36	MEZZC_RSVD1	4	GND
37	R_ETH_SDP0	5	MEZZC_TX_P_ETH2
38	R_ETH_SDP1	6	MEZZC_TX_N_ETH2
39	GND	7	GND
40	MEZZC_TX_P_ETH0	8	MEZZC_LED_P1_0_N
41	MEZZC_TX_N_ETH0	9	MEZZC_LED_P1_1_N

Pin	Name	Pin	Name
42	GND	10	GND
43	MEZZC_LED_P0_0_N	11	MEZZC_TX_P_ETH3
44	MEZZC_LED_P0_1_N	12	MEZZC_TX_N_ETH3
45	GND	13	GND
46	MEZZC_TX_P_ETH1	14	MEZZC_LED_P2_0_N
47	MEZZC_TX_N_ETH1	15	MEZZC_LED_P2_1_N
48	GND	16	GND
49	ETH_CEI0_MDIO_CLK_R	17	OCP_RX_P_ETH2
50	ETH_CEI0_MDIO_DAT_R	18	OCP_RX_N_ETH2
51	GND	19	GND
52	OCP_RX_P_ETH0	20	MEZZ_SCL0
53	OCP_RX_N_ETH0	21	MEZZ_SDA0
54	GND	22	GND
55	MEZZC_LED_P3_0_N	23	OCP_RX_P_ETH3
56	MEZZC_LED_P3_1_N	24	OCP_RX_N_ETH3
57	GND	25	GND
58	OCP_RX_P_ETH1	26	MEZZ_SCL1
59	OCP_RX_N_ETH1	27	MEZZ_SDA1
60	GND	28	GND
61	MEZZ_SCL2	29	MEZZ_SCL3
62	MEZZ_SDA2	30	MEZZ_SDA3
63	GND	31	R_ETH_SDP2
64	MEZZC_PRSNTE_N	32	R_ETH_SDP3

5. Module Interfaces and Configuration

This chapter describes connectors, LEDs and switches that are used on the 10GbE adaptor card. The locations of these items is as below:

5.1. Connector and LED Locations


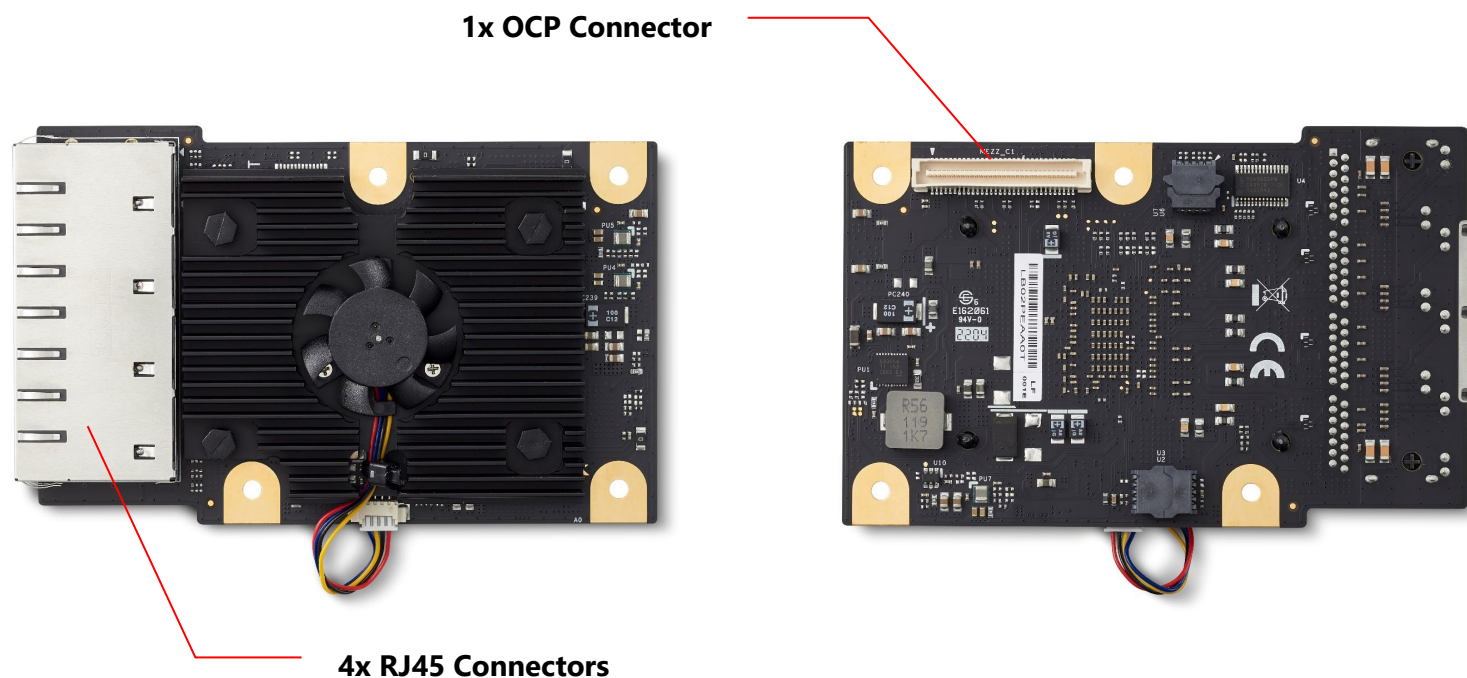


Figure 2 – Module feature locations

5.2. LED Indicators


There are two status LEDs for each 10GBASE-T port

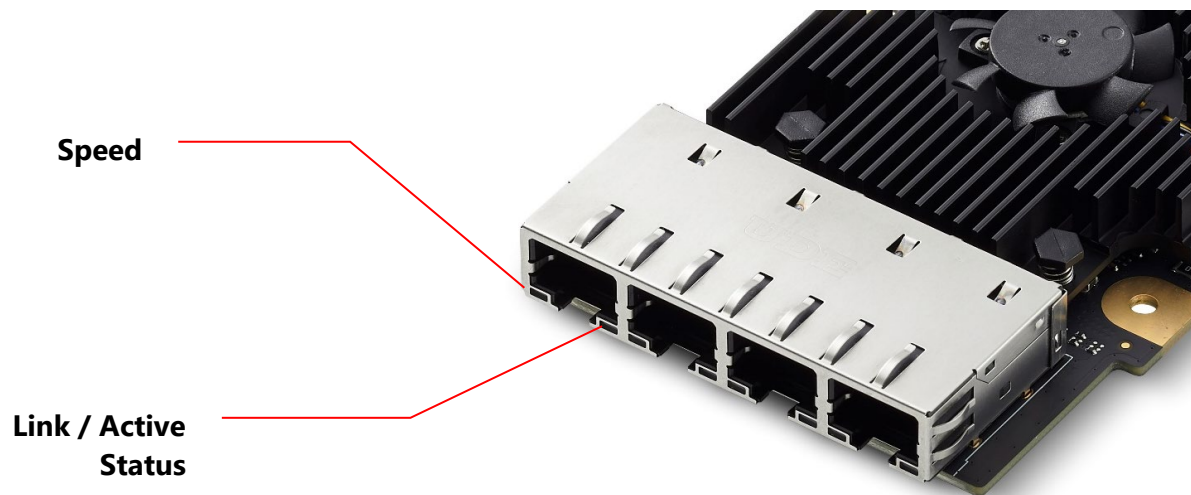

Function	LED Color	LED State	Description
Speed	Green / Yellow	Off	TBC
		Yellow	1 Gbps link speed
		Green	10 Gbps link speed
Link / Active Status	Green	Off	No Link
		Steady On	Link established, no activity detected
		Blinking	Link established, activity detected


5.3. 10GbE Adaptor Card Installation

Below is an example of a 10GbE adaptor card installed on the COM-HPC Server carrier board with a COM-HPC-sIDH Module (or illustration purposes only).

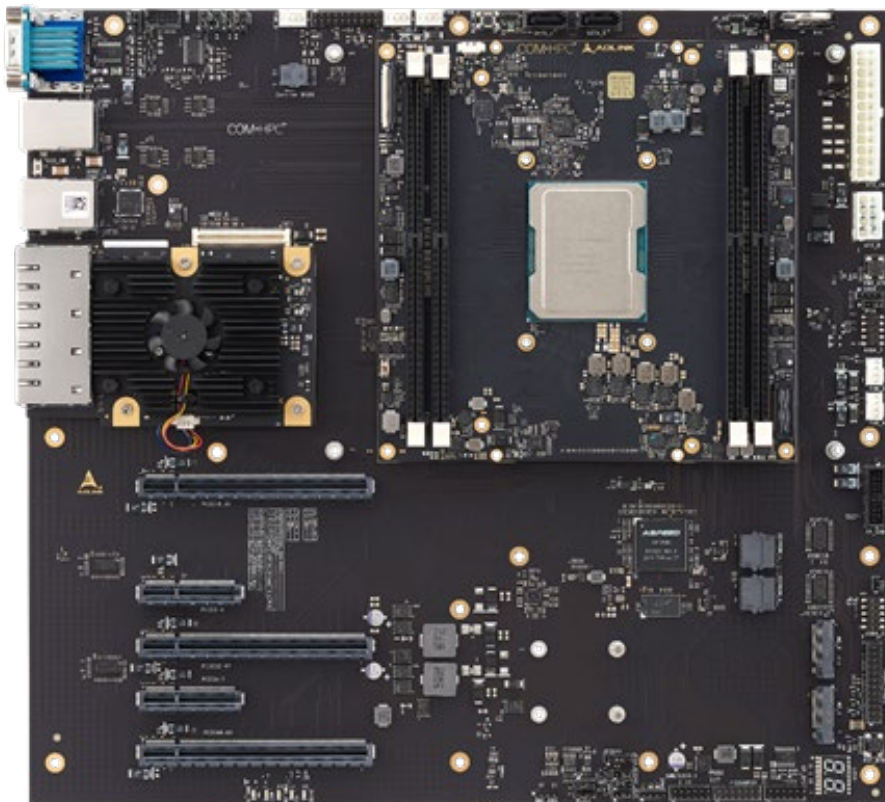

Note: a specific cable and connection will be required if input 5VSB to 10GbE adaptor card is needed for the testing purpose, please contact local ADLINK representative for detail

6. Mechanical

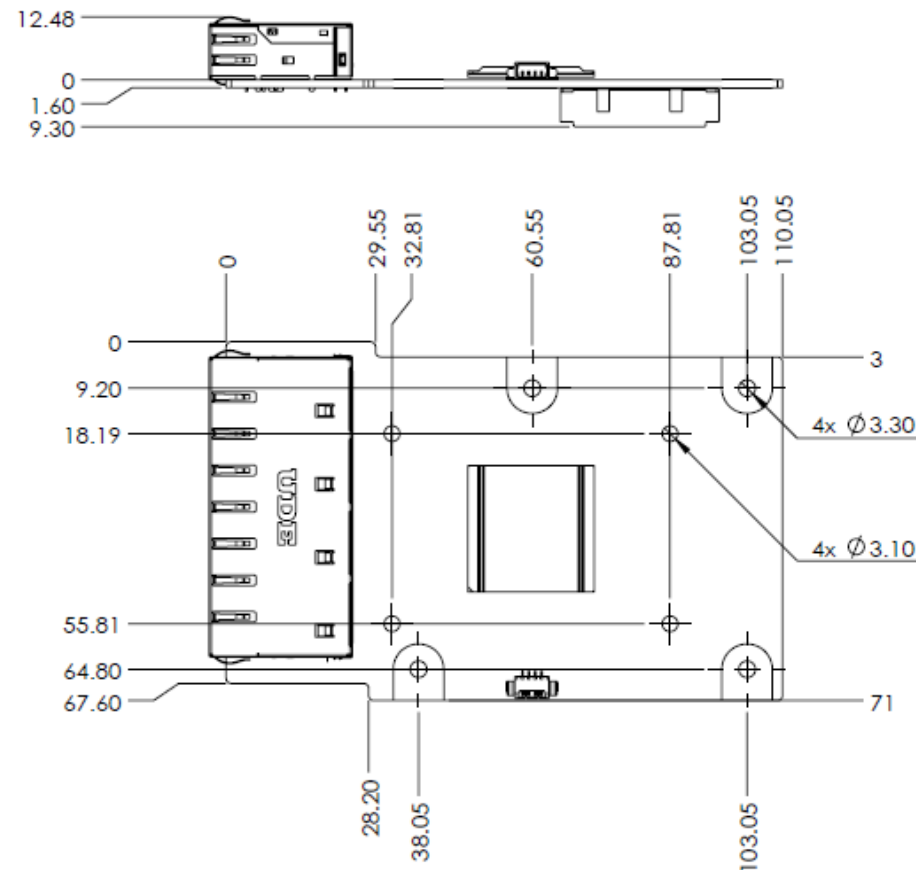

All dimensions are shown in millimeters. Tolerances should be $\pm 0.25\text{mm}$, unless otherwise noted.

Figure 3 – CEI-4x10GBASE-T mechanical dimensions