

MECS-6120

Datasheet

1U 19" Edge Server with Intel® Xeon® D Processor for Communications and 5G MEC Infrastructure Deployment

Features

- 1x Intel® Xeon® D-17XX Series family processor
- 3x DDR4-2666 RDIMM ECC REG up to 192GB
- 2x 2.5" SATA bays and 2x M.2 M Key interfaces
- Flexible platform to meet 5G BBU demands
- Clock sync with GPS/Beidou, IEEE 1588v2 and RS422
- PCIe expansion: 1x PCIe x16 Gen3 & 1x PCIe x8 Gen3 FHFL
- 420mm depth 1U 19" rackmount form factor
- Built-in Intel® QAT: SSL (20G), Compression (15G)
- Intel® eASIC by card for FEC acceleration
- EMC grade: Class B & Advanced chassis management, IPMI v2.0 compliant




Specifications

CPU / Chipset / Memory	CPU	Intel® Xeon® Ice Lake-D SOC Processor 4 to 10C, TDP: 25W to 90W
		Intel® Xeon® D-1746TER 15MB 10c FC-BGA 67W QYQ7
		Intel® Xeon® D-1747NTE 15MB 10c FC-BGA 80W QYQH
		Intel® Xeon® D-1749NT 15MB 10c FC-BGA 90W QYQ2
		Note: For other processor SKUs, please contact your ADLINK representative.
	Memory	3x DDR4-2666 RDIMM sockets, ECC, REG, up to 192GB
BIOS		AMI BIOS on SPI flash memory
Operating Systems		Microsoft Windows Server 2019
		CentOS Linux 7.6
		Ubuntu 22.04
		Note: No OS installed by default
I/O Interfaces	Front Access	
		8x 10G SFP+ Ethernet ports (10C)
		5x 10G SFP+ Ethernet ports (4C, 6C, 8C)
		2x RJ-45 100/1000BASE-T Ethernet ports
		1x USB 3.0/2.0 + 1x USB 2.0
		1x RJ-45 console port
		2x RJ-45 1PPS+TOD port
		1x SMA port for GPS/Beidou signal
	Internal	
		1x COM port
		1x VGA header
		2x PPS CMMX header on motherboard
		3x PPS/10M CMMX header on clock card

Specifications

Expansion		1x PCIe 3.0 x16 (single slot FHFL) via riser card 1x PCIe 3.0 x8 (single slot FHFL) via riser card
Control Buttons (front access)		Power, reset, UID
Chassis Management		IPMI v2.0 compliant with iKVM and SoL support
Storage		2x 2.5" SATA 6Gb/s 2x onboard M.2 SATA/NVMe sockets, 2242/2280 M Key (Supports software RAID 0, 1, 5, 10 by 4 SATA interfaces)
LEDs (front)		Power, alert, drive activity, UID, health behavior
TPM		TPM1.2/2.0 module (Optional)
Hardware Acceleration		Intel® QuickAssist Technology
Regulatory		FCC/CE/CCC class B, UL, CB, and RoHS compliant
Software Support		Validated with DPDK, provides high throughput for data plane packet processing
Thermal Reference for PCIe Card Design		The suggested PCIe bracket air inlet ratio is at least 30%, under which case, the airflow is 11.3 CFM. Note: Please contact your ADLINK representative for detailed information on thermal issue.
Mechanical	Form Factor	1U 19" rackmount 438mm x 44mm x 420mm (WxHxD)
Carton Dimension		572mm x 277mm x 761mm (WxHxD)
Weight		Net Weight: 7Kg Gross Weight: 11Kg Note: System weights are measured with 2 memory modules and 1 SATA drive installed, and without any OCP or PCIe cards.
Cooling		6x adaptive speed fans
Power		450W 1+1 redundant PSUs 100V to 240V AC @50-60Hz -48V to 60V DC
Environmental (PCIe card dependent)		Operating: -5 °C to +55 °C, 5% - 95%RH, non-condensing Note: Not including HDD and PCIe cards. Storage: -40 °C to +70 °C, 5% - 95% RH, non-condensing
Shock		Operating: Half-sine 2G, 11ms pulse, 100 pulses in each direction Non-operating: Trapezoidal, 25G, 170 inches/sec delta V, three drops in each direction
Vibration		Non-operating Vibration: 2.2Grms, 10 minutes per axis in each direction Note: Shock and vibration tests were passed with dual-slot graphics card installed.
Acoustic		Noice < 75 dBA @1m with all fans maximum speed
Regulatory		FCC/CE/CCC class B, CB, UL and RoHS compliant

Dimension

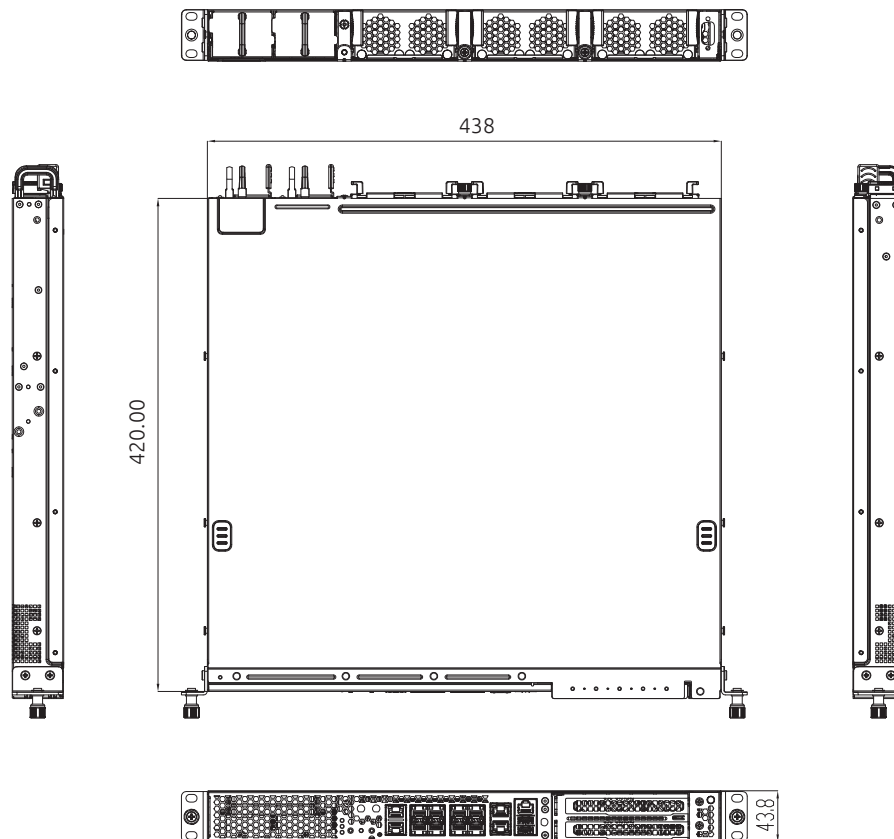

Front View



Rear View

