

NuDAM-6100 Series

Modules supporting Modbus RTU protocol

Introduction

The NuDAM modules provide direct communications with a wide variety of sensors; perform signal conditioning, scaling, linearization and conversion; can acquire measurements of temperature, pressure, flow, voltage, current; and handle multiple digital signal types broadly used in IoT and other industrial applications, such as facility monitoring, environment monitoring, and industrial process control. The new ND-6117, ND-6124, ND-6150, ND-6151, and ND-6160 modules feature Modbus/RTU as the best remote data transmission protocol, which provides customers a comprehensive product offering.



Common Specifications

General

Item	Description
Power input range	+10~+30 VDC (reversal protection)
Power consumption	ND-6017: 0.8 W ND-6124: 3 W ND-6150: 1.5 W ND-6160: 1.8 W ND-6151: 1.2W
Isolation protection	3000 VDC
Operation temperature	-10~70 °C
Regulation	CE/FCC


Serial

Item	Description
Interface	RS-485, 2-wire
Communication protocol	Modbus RTU & ASCII
Speed	1200 to 115200
Data flow control	Yes
Parity	Even, Odd, None
Data bits	8-bit
Stop bits	1- or 2-bit

Ordering Information

- **ND-6117**
8-ch analog input, RS-485, Modbus RTU and ASCII
- **ND-6124**
4-ch analog output, 4-ch digital input, RS-485, Modbus RTU and ASCII
- **ND-6150**
8-ch digital input, 8-ch digital output, RS-485, Modbus RTU and ASCII
- **ND-6160**
4-ch relay output, 4-ch digital input, RS-485, Modbus RTU and ASCII
- **ND-6151**
16 digital input channels, RS-485, Modbus RTU and ASCII

Solution Diagram

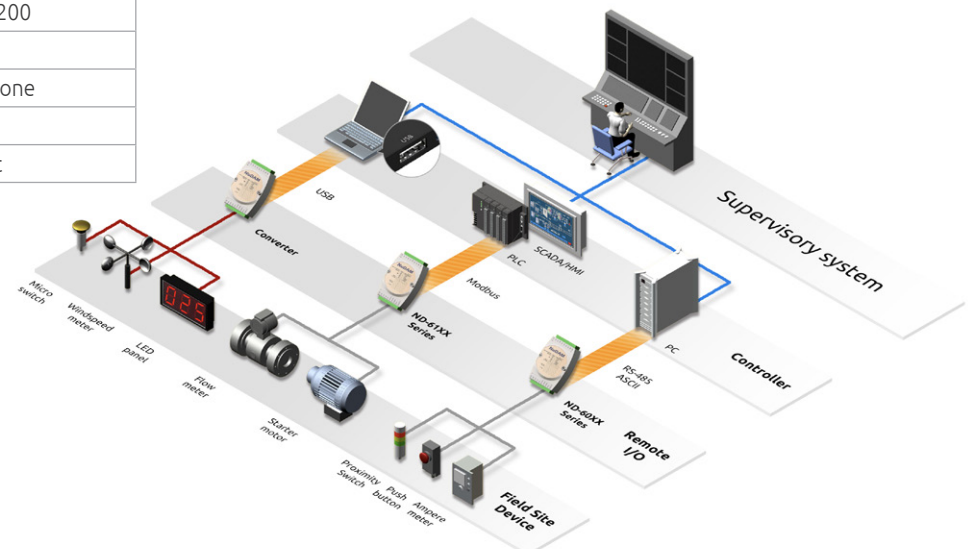

Specifications

	ND-6117	ND-6124	ND-6150	ND-6160	ND-6151
Function	Analog input	Analog output & digital input	Digital input & output	Relay output & digital input	Digital input
Analog input					
Channel	8 differential or 6 differential & 2 single-ended	-	-	-	-
Resolution	16/12-bit	-	-	-	-
Sample rate (Software selectable)	60/s (12-bit) 10/s (16-bit)	-	-	-	-
Input range(Voltage)	±150/500 mV, ±1/5/20 V	-	-	-	-
Input range(Current)	±20 mA	-	-	-	-
Analog output					
Channel	-	4	-	-	-
Resolution	-	14-bit	-	-	-
Output range(Voltage)	-	0-5V, ±5V, 0-10V, ±10V	-	-	-
Output range(Current)	-	0-20 mA	-	-	-
Accuracy(Voltage)	-	±0.02% of FSR	-	-	-
Accuracy(Current)	-	±0.1% of FSR	-	-	-
Digital output					
Channel	-	-	8 isolated output (source)	4 relay output	-
Max. load current	-	-	650mA per channel	-	-
Output isolation Voltage	-	-	3750Vrms	-	-
Relay contact rating(AC)	-	-	-	0.6A/125Vac	-
Relay contact rating(DC)	-	-	-	2A/30Vdc	-
ON/OFF time interval	-	-	-	Operate Time: 3ms max. Release Time: 2ms max.	-
Digital input					
Channel	-	4 isolated with common source	8 (sink/source) Isolated with common source	4 isolated with common source	16 Isolated single ended with common source or common ground
Wet Contact Input	-	Low(0): 1V max.	Low(0): 1V max.	Low(0): 1V max.	Low(0): 1V max
	-	High(1): 10V to 30V	High(1): 10V to 30V	High(1): 10V to 30V	High(1): 10 to 50V
Dry Contact Input:	-	-	Low(0): open High(1): close to DI.GND	-	Low(0): open High(1): close to DI.GND
Input isolation Voltage	-	3750Vrms	3750Vrms	3750Vrms	3750Vrms
General Spec					
Operation temp.	-10-70 °C	-10-70 °C	-10-70 °C	-10-70 °C	-10-70 °C
Communication protocol	Modbus RTU & ASCII				